


PRODUCT INFORMATION SHEET

DESCRIPTION:	140mm Hollow light weight
PRODUCT CODE:	15-01 (M15010WHNAT00LW)
DIMENSIONS:	140 x 190 x 390 mm (W x H x L) (+/- Tolerance to AS 4455.1) Minimum face shell thickness 25mm
STRENGTH:	Characteristic Unconfined Compressive Strength \geq 15 MPa
FIRE RESISTANCE:	120 /120/120 (Srf <u><</u> 21.14)
DURABILITY:	General Purpose
WEIGHT: 10.6 Kg <u>+</u> 10%	6 NO. PER PALLET: 144 Units NO. PER M ² : 12.5 Units



ACOUSTIC DESIGN:

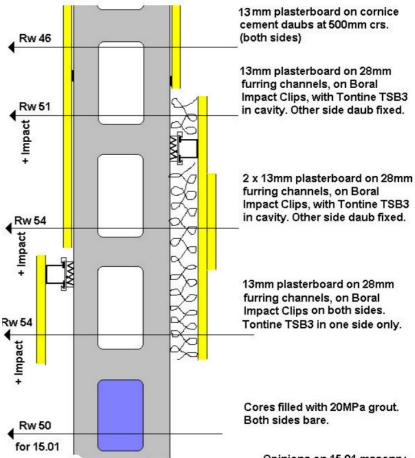

Opinions on 15.01 masonry linings from Graeme Harding Opinions on grouted blocks from Bassett Acoustics.

Manufactured to AS/NZS 4455.1:2008. Fire Resistance Levels as per Exova Warringtonfire Assessment Report #28339-00. Acoustic performance opinions from Graeme Harding & Bassett Acoustics (Acoustic Consultants). The information above is for general description purposes only. 11/03/2013 - subject to change without notice.