


PRODUCT INFORMATION SHEET

Description:	140mm Hollow cleanout light weight	
Product Code:	15-45 (M15450LANAT00LW)	
Dimensions:	140 x 190 x 390 mm (W x H x L) (+/- Tolerance to AS 4455.1) Minimum face shell thickness 50mm	
Strength:	Characteristic Unconfined Compressive Strength \geq 15 MPa	
Fire Resistance:	120min Insulation (core-filled, DTS AS3700)	
Durability:	Exposure Grade (determined by AS/NZS 4456.10 – Resistance to Salt Attack)	
Weight: 10.2 Kg \pm 10%	No. Per Pallet: 120 Units	No. Per m²: 12.5 Units

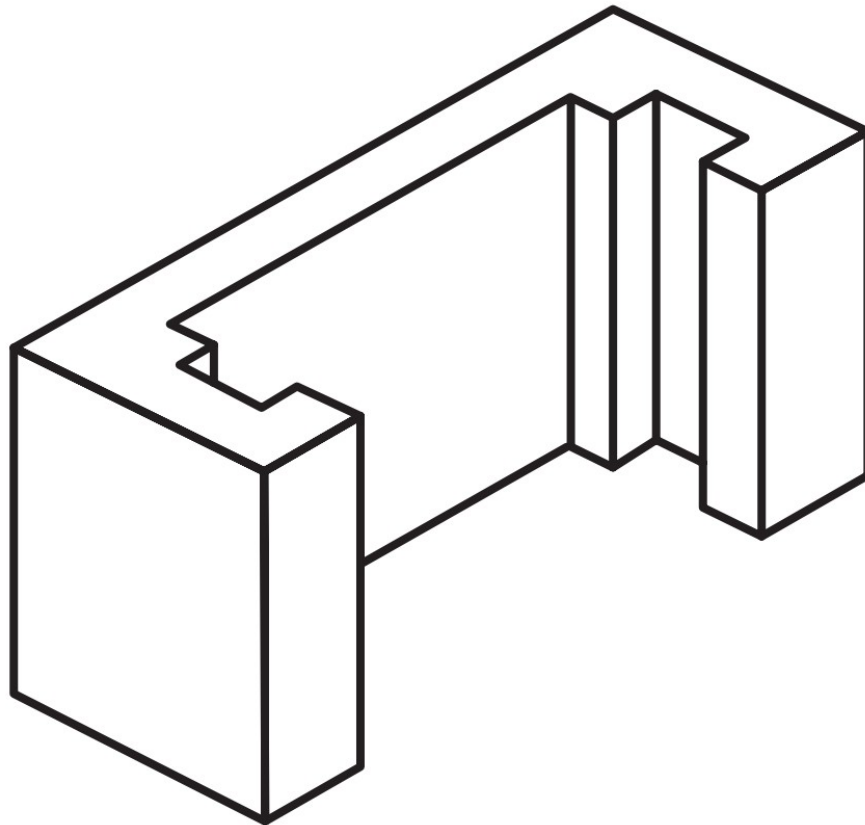

Manufactured to AS/NZS 4455.1:2008.

Durability as per BMRL Research Laboratory test certificate #8263, AS/NZS 4456.10 Method B.

The information above is for general description purposes only.
17/10/2021 - subject to change without notice.