


PRODUCT INFORMATION SHEET

Description:	190mm Hollow channel light weight	
Product Code:	20-42 (M20420WHNAT00LW)	
Dimensions:	190 x 190 x 390 mm (W x H x L) (+/- Tolerance to AS 4455.1) Minimum face shell thickness 30mm	
Strength:	Characteristic Unconfined Compressive Strength \geq 15 MPa	
Fire Resistance:	120 /120/120 (Srf \leq 21.14)	
Durability:	Exposure Grade (determined by AS/NZS 4456.10 - Resistance to Salt Attack)	
Weight: 13.1 Kg \pm 10%	No. Per Pallet: 108 Units	No. Per m²: 12.5 Units

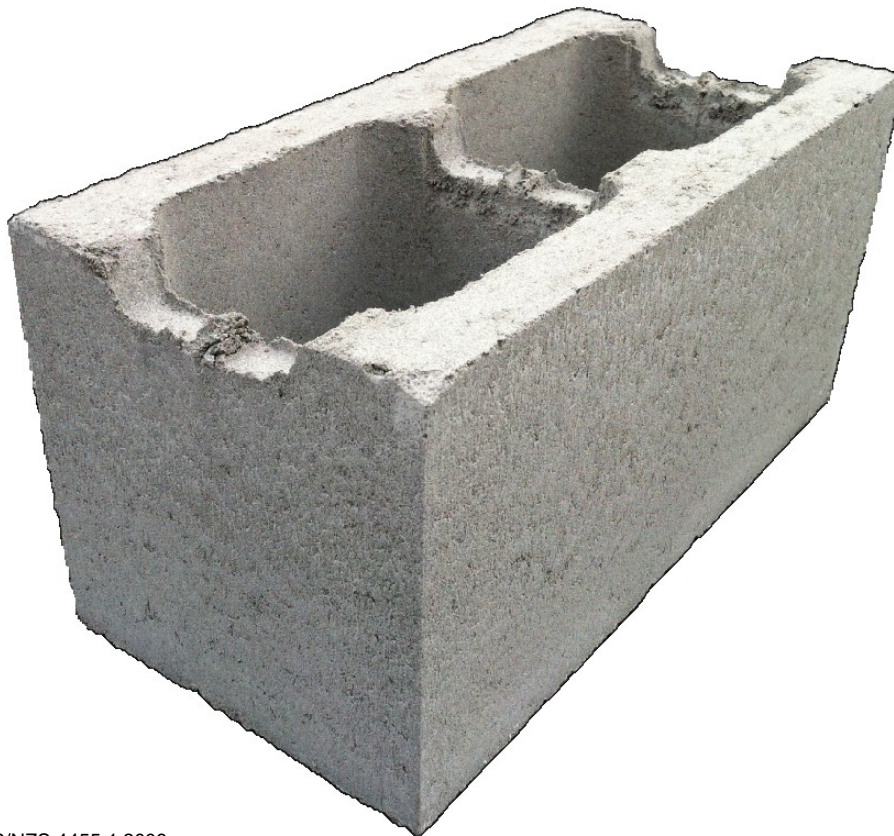

Manufactured to AS/NZS 4455.1:2008

Fire Resistance Levels as per Exova Warringtonfire Assessment Report #28339-03.

** Durability as per BMRL Research Laboratory test certificate #8263, AS/NZS 4456.10 Method B.

The information above is for general description purposes only.

28/08/2020 - subject to change without notice.