


PRODUCT INFORMATION SHEET

Weight: 16.65 Kg	+10% No. Per Pallet: 60 Units No. Per m ² : 12.5 Units
Durability:	Exposure Grade (determined by AS/NZS 4456.10 – Resistance to Salt Attack)
Fire Resistance:	240 / 240 / 240 (Srf \leq 36) FRL (grouted & reinforced, AS 3700 DTS)
Strength:	Characteristic Unconfined Compressive Strength <a> 15 MPa
Dimensions:	290 x 190 x 390 mm (W x H x L) (+/- Tolerance to AS 4455.1) Minimum face shell thickness 50mm
Product Code:	30-45 (M30450LANAT00LW)
Description:	290mm Cleanout light weight

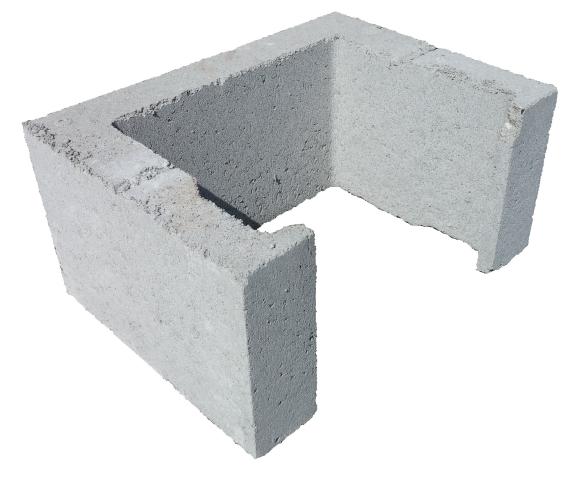

Manufactured to AS/NZS 4455.1:2008.

Durability as per BMRL Research Laboratory test certificate #8263, AS/NZS 4456.10 Method B.

The information above is for general description purposes only. 24/02/2021 - subject to change without notice.