


## PRODUCT INFORMATION SHEET

<b>DESCRIPTION:</b>	190mm 'H Block' light weight
<b>PRODUCT CODE:</b>	20-48 (M20480WHNAT00LW)
<b>DIMENSIONS:</b>	190 x 190 x 390 mm (W x H x L) (+/- Tolerance to AS 4455.1) Minimum face shell thickness 30mm
<b>STRENGTH:</b>	Characteristic Unconfined Compressive Strength $\geq$ 15 MPa
<b>FIRE RESISTANCE:</b>	120/120/120 (Srf $\leq$ 21.14) 240/240/240 (Srf $\leq$ 15 if unreinforced) (D.T.S. as per AS3700 Sec. 6)
<b>DURABILITY:</b>	General Purpose
<b>WEIGHT:</b> 11.6 Kg $\pm$ 10%	<b>NO. PER PALLET:</b> 108 Units <b>NO. PER M<sup>2</sup>:</b> 12.5 Units

### ACOUSTIC DESIGN:

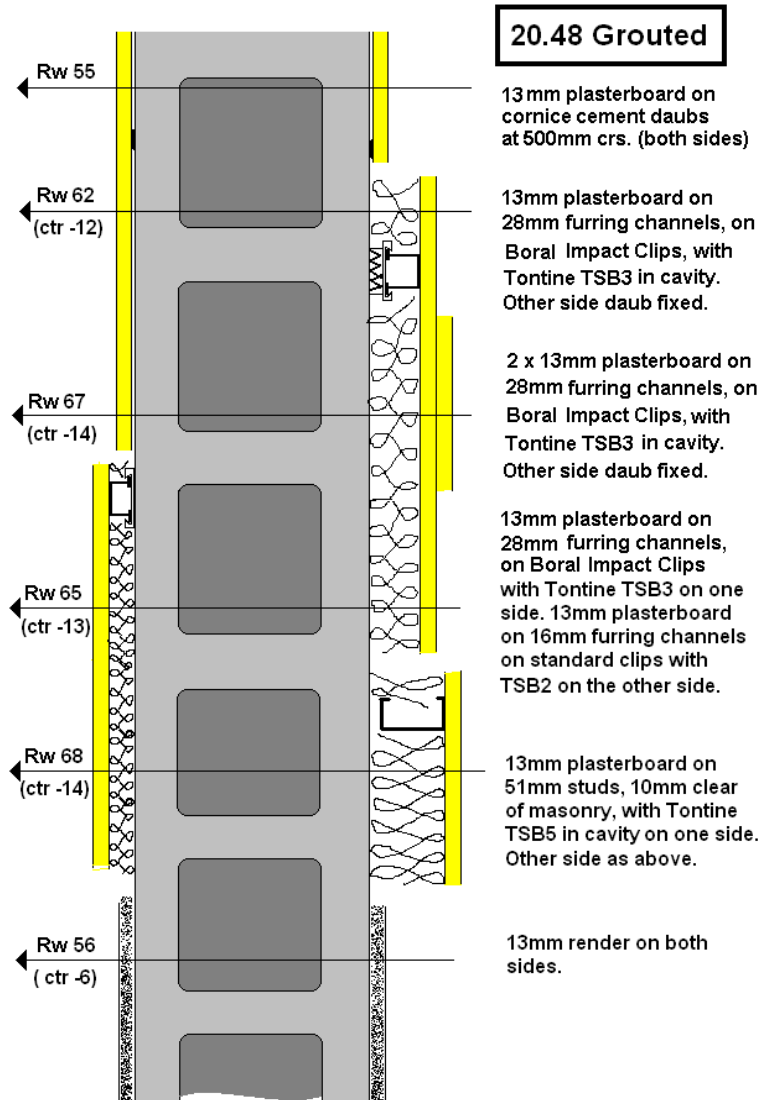

Manufactured to AS/NZS 4455.1:2008.  
Fire Resistance Levels as per Exova Warringtonfire Assessment Report #28339-00 & AS3700  
Acoustic performance estimates calculated by Wilkinson Murray (Acoustic Consultants).  
The information above is for general description purposes only.  
11/03/2013 - subject to change without notice.